Product Submittal Form

For Residential and Commercial Applications

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

PR14/ PR34/ MPR14 Multi-Turn Straight Stop - CPVC x Compression

Use: For use in potable water distribution systems. Not intended for recirculating water systems that produce continuous use temperatures above 115° F. For those applications, use BrassCraft KT series ball stops.

Design Features:

- **Machined one-piece brass body** provides strength, durability and long-lasting performance
- **Oval knurled handle** provides a secure grip and smooth on/off operation
- **Compliant Multi-Turn Stops** available for California, Vermont and Maryland "low-lead" requirements

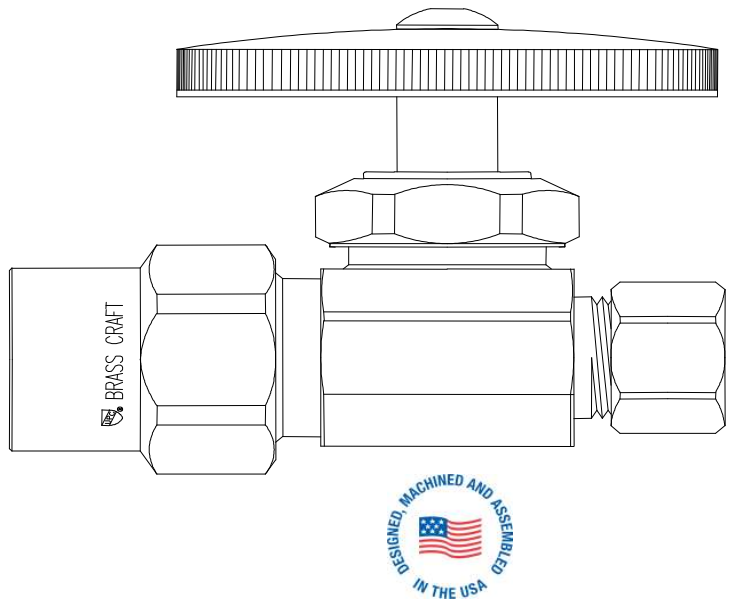

Operating Specifications:

Temperature: 40°- 140° F
Pressure: 125 psi maximum

Standard

MATERIAL SPECIFICATIONS	
Valve Body	*C36000 brass*
Stem	*POM or C36000 brass**
Bib & Packing Washers	*Nitrile or EPDM rubber*
Packing Nut	*C36000 brass*
Handle	*Lexan*
Handle Screw	*Zinc-plated steel*
CPVC Insert	*CPVC 23447-B*
CPVC Washer	*EPDM rubber*
Compression Sleeve	*C36000 brass*
CPVC & Compr. Nut	*C36000 brass*

Compliant

MATERIAL SPECIFICATIONS	
Valve Body	*Compliant brass*
Stem	*POM or Compliant brass**
Bib & Packing Washers	*Nitrile or EPDM rubber*
Packing Nut	*Compliant brass*
Handle	*Lexan*
Handle Screw	*Zinc-plated steel*
CPVC Insert	*CPVC 23447-B*
CPVC Washer	*EPDM rubber*
Compression Sleeve	*C36000 brass*
CPVC & Compr. Nut	*C36000 brass*

**Where Specified*

Standard Part Listing:

☐	PR14 C	1/2" Nom. CPVC x 3/8" OD Compression, chrome plated
☐	PR14 C1	1/2" Nom. CPVC x 3/8" OD Compression, chrome plated, window tray
☐	PR14 C3T	1/2" Nom. CPVC x 3/8" OD Compression, chrome plated, plain tray, sleeve of 3
☐	PR14 R	1/2" Nom. CPVC x 3/8" OD Compression, rough brass
☐	PR14Z C	1/2" Nom. CPVC x 3/8" OD Compression, brass stem, chrome plated
☐	PR14 BZ	1/2" Nom. CPVC x 3/8" OD Compression, oil rubbed bronze

This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.

© 2010 Brass-Craft Mfg.

PR14/ PR34/ MPR14 Multi-Turn Straight Stop - CPVC x Compression

Standard Part Listing (con't):

☐	PR14 NS	1/2" Nom. CPVC x 3/8" OD Compression, satin nickel
☐	PR34 C	1/2" Nom. CPVC x 1/2" OD Compression, chrome plated
☐	PR34 R	1/2" Nom. CPVC x 1/2" OD Compression, rough brass
☐	MPR14 C	1/2" Nom. CPVC x 3/8" OD Compression, metal handle, chrome plated

Compliant Part Listing:

☐	PR14X C	1/2" Nom. CPVC x 3/8" OD Compression, chrome plated
☐	PR14X C1	1/2" Nom. CPVC x 3/8" OD Compression, chrome plated, window tray

PART DIMENSIONS *(Inches)*		
Model	***DIM. A***	***DIM. B***
PR14	1.77	2.60
PR14Z	1.77	2.60
PR34	1.77	2.67
MPR14	1.77	2.60

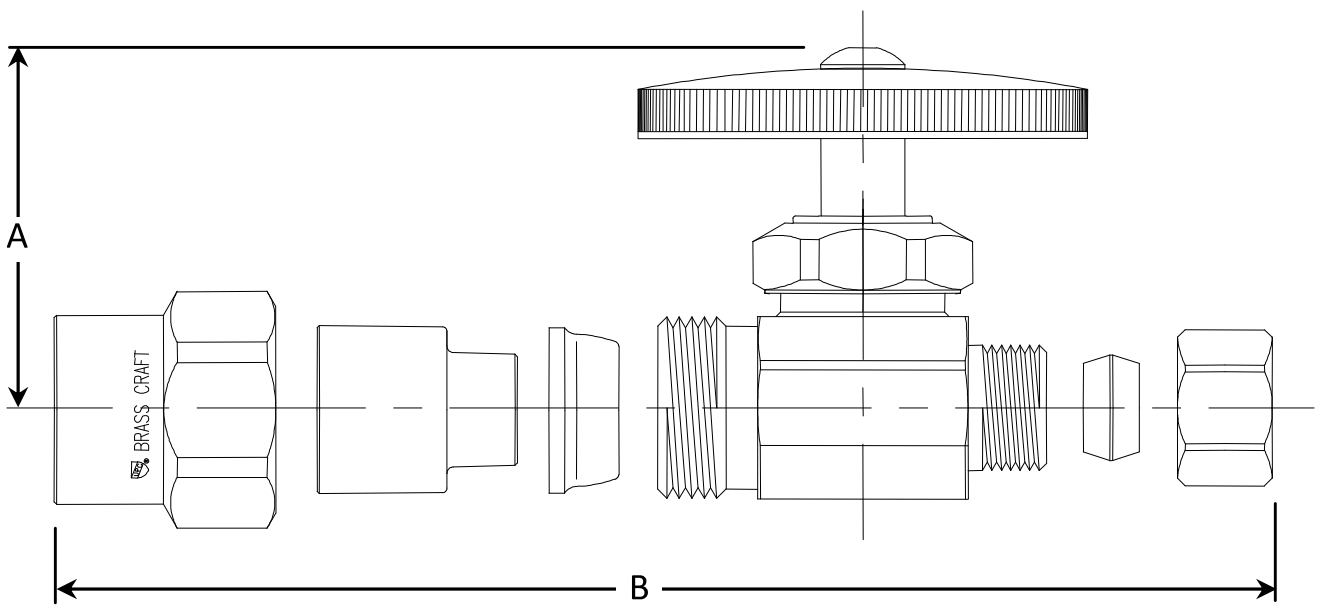

Listings & Certifications:

- IAPMO listed to ASME A112.18.1-05 / CSA B125.1-05 (File # 0645)
- CSA listed to ASME A112.18.1-05 / CSA B125.1-05 (File # 204593)
- Compliant product CSA approved to California Health & Safety Code 116875, Vermont Bill S.152 and Maryland House Bill 372 (Project # 2174785)

This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.

© 2010 Brass-Craft Mfg.

Product Submittal Form